



CNZ Series

The Ultimate Low-Profile Torque Wrench

When the job demands full power in a fraction of the space, turn to ABS CNZ. Engineered for the most space-restricted bolting tasks, the sleek, ultra-compact design delivers unmatched accessibility.

The CNZ series effortlessly slips into applications with tight overhead clearances, providing precision torque for tightening and maximum breakaway power for the toughest bolt break-out challenges.

TORQUE RANGE -
100 - 80150 Nm | 74 - 59120 ft. lbs.



Secondary Pawl for Faster Tightening

Tighten bolts faster with a secondary pawl that speeds cycles and prevents rollback for reliable performance.



360° x 360° Hose Uniswivel

Achieve full control with a 360° x 360° hose uniswivel that reaches any angle with ease.



Ratchet Freeing Mechanism

Ensures quick release of tool from the job without getting stuck



Torque Accuracy

Delivers precision torque with $\pm 3\%$ accuracy.



Multipurpose Accessories

Enhance your versatility with a range of multipurpose accessories (not included) that cater to your specific bolting needs.



ATEX & CE certified

ATEX & CE certified for global safety compliance



ADVANCED BOLTING SOLUTIONS PVT. LTD.



HO: ABS House, W-116 (A), T.T.C. Industrial Area,
 MIDC Khairane, Navi Mumbai - 400 710.

Phone: +91 82828 29795
 Email: marketing@absgroupglobal.com

www.absgroupglobal.com



Tool Accessories & Components

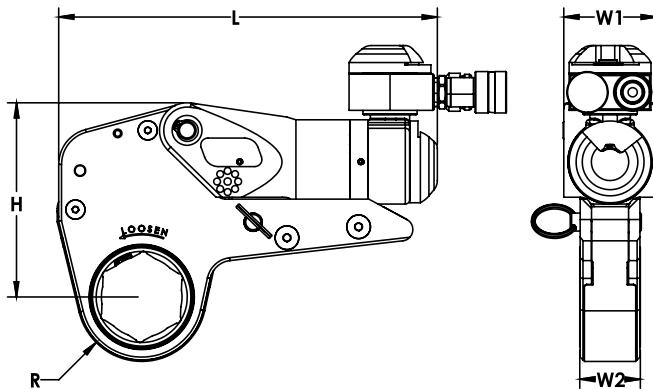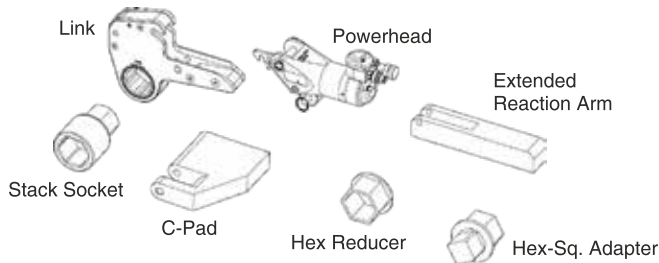

Technical Specification

MODEL	H (inch/ mm)	W1 (inch/ mm)	W2 (inch/ mm)	L (inch/ mm)	R (inch/ mm)	HEX (inch/mm)	WEIGHT (lbs/kg) (Without Link)	TORQUE (ft.lbs./Nm)	
								MIN.	MAX.
CNZ-01	3.36 85.5	1.50 38.3	1.10 28	6.28 159.7	0.80 20.38	3/4" - 1 5/8" 19-41	1.8 0.8	74 100	723 980
CNZ-02	4.02 102.1	1.97 50	1.25 31.8	7.5 190.4	0.95 - 1.79 24.1 - 45.5	3/4" - 2 3/8" 19 - 60	1.98 0.9	243 329	1686 2286
CNZ-05	5.37 136.4	2.59 65.8	1.67 42.4	10.16 266	1.30 - 2.30 34 - 58.9	1 5/16" - 3 1/8" 34 - 80	4.41 2	580 786	3853 5224
CNZ-10	6.7 170.3	3.23 82.15	2.09 53	12.29 312.1	1.78 - 2.90 45 - 73.9	2" - 3 7/8" 50 - 100	7.50 3.4	1142 1549	8146 11045
CNZ-18	8.04 204.1	3.87 98.4	2.49 63.2	14.66 372.4	2.31 - 3.48 58.9 - 88.4	2 3/4" - 4 5/8" 70 - 120	12.13 5.5	2009 2724	13392 18157
CNZ-25	9.09 231	4.41 112	2.83 72	16.57 421	2.47 - 4.21 62.8 - 107	2 3/4" - 5 3/4" 70 - 145	14.85 6.7	2790 3780	19100 25881
CNZ-42	10.71 272.1	5.18 131.5	3.33 84.6	19.46 494.25	3.03 - 4.72 77 - 120	3 1/2" - 6 1/2" 90 - 165	24.03 10.9	4577 6205	30967 41986
CNZ-80	13.39 340.1	6.46 164.1	4.16 105.8	21.14 573	4.26 - 5.79 108 - 147	4-5/8" - 7-1/2" 120 - 190	48 21.7	8887 12020	59120 80150

*Minimum and maximum torque output data may vary.

ADVANCED BOLTING SOLUTIONS PVT. LTD.

HO: ABS House, W-116 (A), T.T.C. Industrial Area,
MIDC Khairane, Navi Mumbai - 400 710.

Phone: +91 82828 29795
Email: marketing@absgroupglobal.com

www.absgroupglobal.com

